



# CJV13E系列 series




应用领域：高端醫療器械、  
保健器材、  
家用電器、  
廚房衛浴、  
美容美體等

Application: High-end medical equipment,  
Health care equipment,  
Household appliance,  
Kitchen and bathroom,  
Cosmetology and bodycare etc.



| 產品參數表 Parameters                                                               |                       |                       |                         |                         |                                                   |                                 |                                 |
|--------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------------|-------------------------|---------------------------------------------------|---------------------------------|---------------------------------|
| 型號<br>Model                                                                    | 額定電壓<br>Rated voltage | 額定電流<br>Rated current | 直流阻抗<br>DC resistance   | 功率<br>Power consumption | 排氣速度<br>Exhaust speed<br>300mmHg→<br>15mmHg 500CC | 氣密性<br>Leakage<br>300mmHg 500CC | 最低啓動電壓<br>Min operating voltage |
| CJV13-E06A1                                                                    | DC6V                  | 200 mA±10%            | 30 Ω±10%                | 1.2w                    | < 10 S                                            | < 3 mmHg/min                    | < 5.6 V                         |
| CJV13-E12A1                                                                    | DC12V                 | 100 mA±10%            | 120 Ω±10%               | 1.2w                    | < 5 S                                             | < 3 mmHg/min                    | < 10 V                          |
| CJV13-E24A1                                                                    | DC24V                 | 57 mA±10%             | 420 Ω±10%               | 1.368w                  | < 5 S                                             | < 3 mmHg/min                    | < 20 V                          |
| 其它參數 Others                                                                    |                       |                       |                         |                         |                                                   |                                 |                                 |
| 壽命實驗 Life test                                                                 |                       |                       | 30,000次 (500CC容器，11S/次) |                         |                                                   |                                 |                                 |
| 使用環境 Working environment                                                       |                       |                       | 0~50°C，75%RH            |                         |                                                   |                                 |                                 |
| 可根據客戶具體要求進行定制。Customization based on specific customer requirements available. |                       |                       |                         |                         |                                                   |                                 |                                 |

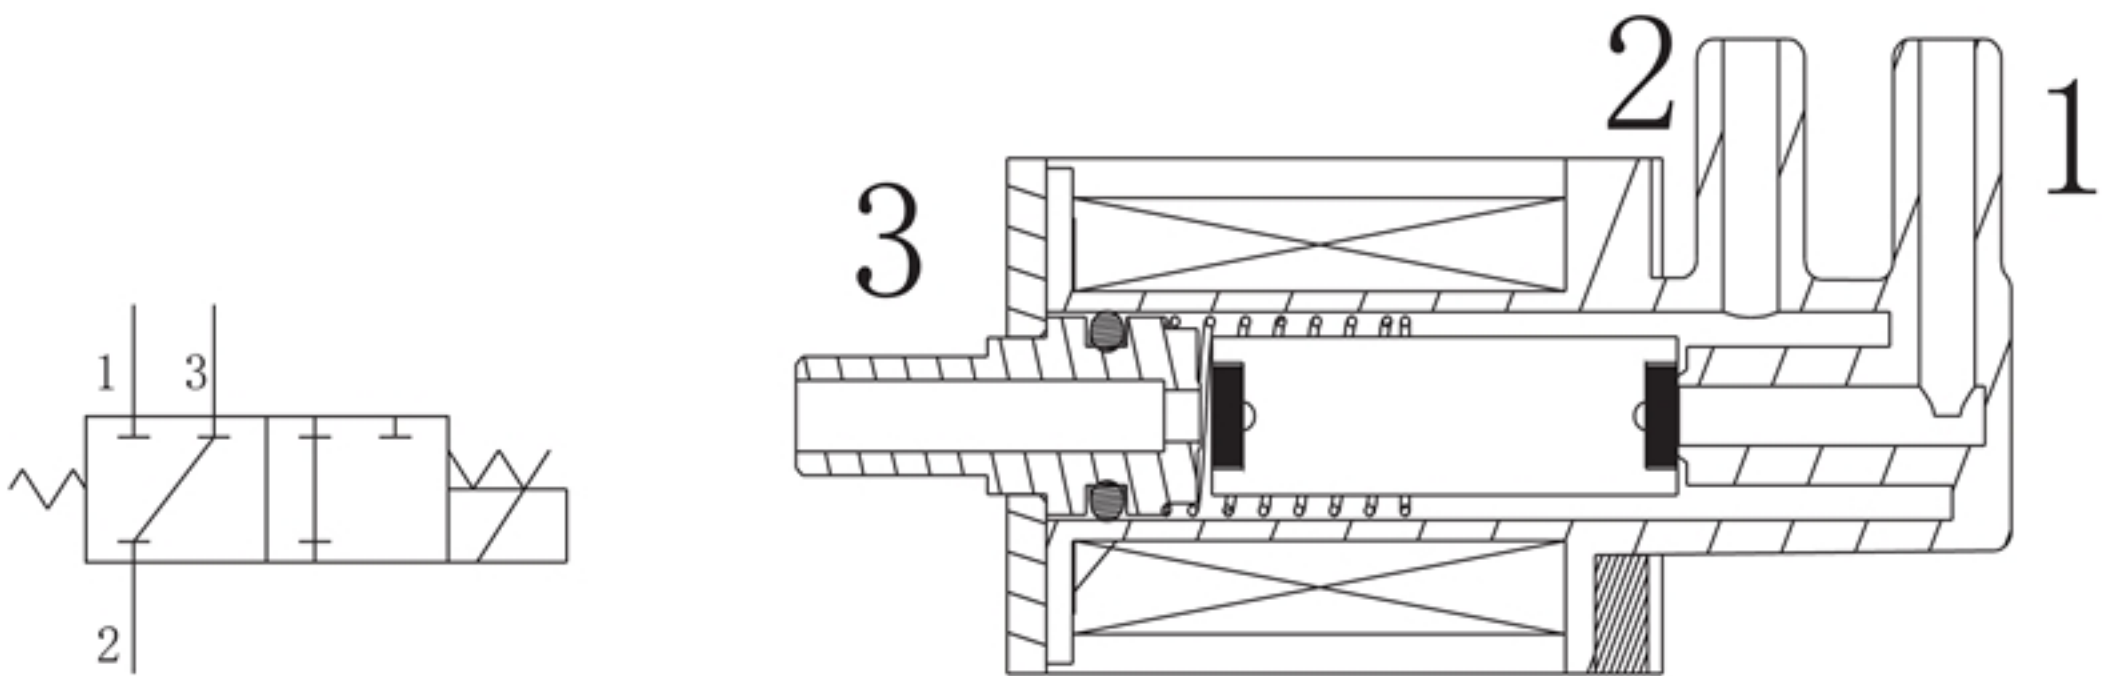

產品構造圖  
Dimension Drawing

